
FANTE
SHREDDER & RECYCLING

南京锋特机械制造有限公司

工厂地址 1：江苏省南京市溧水区明觉工业园
工厂地址 2：江苏省南京市溧水区秀山西路 7 号
社交账号（Whatsapp&Wechat）：+86 13770963575
电子邮件：fante@fanterecycling.com

Nanjing Fante Machinery Manufacture Co., Ltd.

Factory Add 1: Mingjue zone, Lishui District,Nanjing, China
Factory Add 2: 7# Xiushan West Road,Lishui District,Nanjing
Whatsapp&Wechat: +86 13770963575
E-Mail: fante@fanterecycling.com

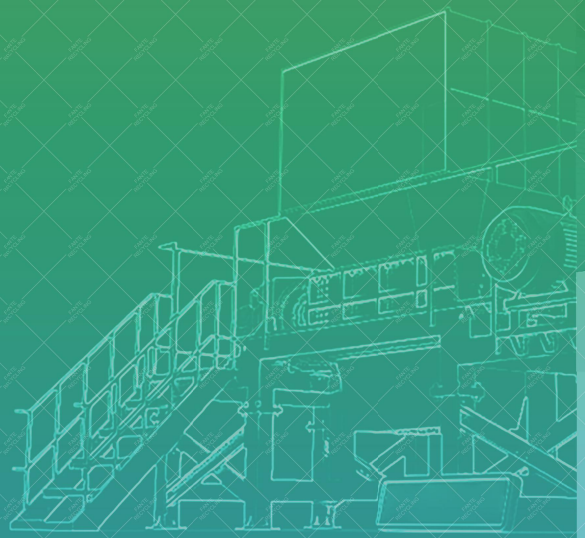

FANTE
SHREDDER & RECYCLING



锋特机械
FANTE BROCHURE

Turn waste into wealth

Global solid waste recycling solution provider

关于锋特
ABOUT FANTE

锋特是全球领先的破碎与回收设备制造商，拥有 16 年行业经验，专业生产废旧轮胎、生活垃圾、线缆、电子垃圾、废旧金属、生物质等工业破碎与回收设备。我们提供7X24 小时专业技术支持与海外安装服务，并提供2 – 8 年超长质保，有效提升客户设备运行效率与产能。

FANTE is a global leading shredding and recycling equipment manufacturer with 16 years of experience, offering shredders and recycling equipments for tyres, municipal solid waste, cables, e- waste, iron,biomass and many other industrial applications. Professional technical support(7x24 hours on line and abroad installation) and super long time after sales service with 2-8 years that increase our customer's uptime and productivity.

20+Years
专业知识和经验
of know-how and experience

>2,000
成功实施切碎解决方案
successfully implemented shredding solutions

80+
合作伙伴
Cooperatives



目录
PRODUCT LIST

双轴撕碎机 Double Shaft Shredder 01
单轴撕碎机 Single Shaft Shredder 07
粉碎机 Crushing Machine 11
立式破碎机 Vertical Crusher 15
卧式破碎机 Horizontal Crusher 17
铜米机 Copper Wire Granulator 19
废弃轮胎预处理设备 Pre-treatment Equipment for Waste Tires 21
自动化轮胎回收系统 A Automatic Tire Recycling System A 23
自动化轮胎回收系统 B Automatic Tire Recycling System B 27
橡胶粉碎机 / 精炼机 Rubber Crusher / Refine 29
锂电池回收系统 Lithium Battery Recycling System 31
电路板回收系统 PCB Recycling System 33
废旧电线回收系统 Waste Wire Recycling System 35
电子垃圾/铜铝水箱回收系统 E-Waste/Copper and Aluminum Water Tank Recycling System 37
废金属回收系统 Scrap Metal Recycling System 39

双轴撕碎机
Double shaft shredder

FTS/FT2S

低速、高扭矩运行可最大限度地降低噪音和功耗，同时实现高吞吐量。这些机器特别适用于松散或体积庞大的材料，这些材料可能含有污染物，例如纸张、木材、塑料等。

Low-speed, high-torque operation minimizes noise and power consumption while achievirg high throughput rates. These machines are particularly suited to the size reduction of buky or voluminous materials, which may contain contaminants such as paper, wood, plastic, etc.

FTHS-W

HS-W系列专为具有高缠绕倾向的物料（如纺织品和塑料薄膜）而设计。其特殊的刀具设计可防止物料在粉碎过程中缠绕主轴，从而确保运行顺畅并防止过载。

The HS-W series is specially designed for materials with high winding tendencies, such as textiles and plastic films. Its specialized cutter design prevents the material from winding around the spindle during shredding, ensuring smooth operation and preventing overload.

FTHS-T

HS-T系列专为轮胎粉碎而研发生产，配备旋转筛网，可将粉碎物料控制在50*50毫米以下。

The HS-T series is specially developed and produced for tire shredding. It is equipped with rotary screen to control the shredded material to be less than 50*50mm.

FTHS-P


HS-P系列专为涉及金属和其他硬质材料的研发应用而设计。其行星齿轮减速机可提供更高的扭矩，从而确保更顺畅的剪切。


The HS-P series is specially designed for R&D applications involving metals and other hard materials. Its planetary gear reducer delivers higher torque, ensuring smoother shearing.

FTHS

HS系列双轴撕碎机是极高扭矩、高吞吐量的旋转剪切式粉碎设备，它们通常用于对大体积或高强度物料（可能含有污染物）进行预撕碎。其独特的模块化对开式腔体设计便于检修关键部件，从而减少停机维护时间和维修成本。

The HS Series double-shaft shredders are extremely high-torque, high-throughput, rotating shear-type size reduction machines. They are often used for pre-shredding large volume or high-strength materials, which may contain contamination. The unique modular split chamber design provides excellent access to key components, thereby reducing maintenance downtime and service costs.

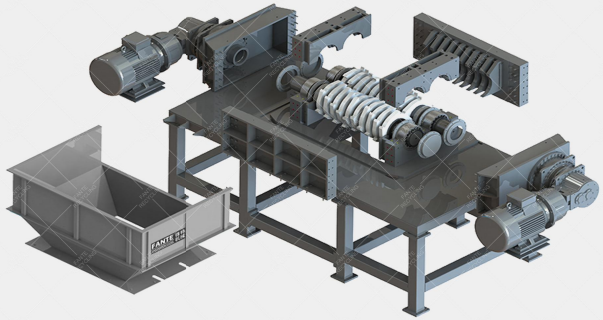




转筛

为有效控制成品尺寸，在切割室周围安装圆形筛网是理想方案。该旋转筛网以低速运转，超尺寸物料将被循环送回切割室进行二次粉碎，而符合尺寸要求的物料则穿过筛网进入后续工序。

Rotary Screen

To effectively control the output product size, a circular screen mounted around the cutting chamber is the ideal solution. The rotary screen runs at low speed, the oversized fractions are recirculated back to the cutting chamber for further shredding, whilst the sized fraction falls through the screen to the next process.




分段式刀片

分段式刀片设计可大幅缩短刀片更换时间并降低成本。
该刀片由刀片座及两种刀片段组成——带钩与不带钩。只需卸下固定螺钉，即可快速便捷地拆卸磨损的刀片段并进行更换。由于无需将刀片座从轴上拆卸，从而简化了维护流程并减少了停机时间。

Segmented Blades

The segmented blade design can greatly reduce blade changing time and cost.
The blade comprises the blade holder and two types of blade segments: with and without hooks. Worn blade segments can quickly and easily be removed and replaced by simply removing the securing screws. As the blade holders need not be removed from the shafts, simplified maintenance and reduced downtime result.



刀片配置与宽度

刀片轮廓和宽度可根据加工材料类型进行定制。通过调节刀片厚度可控制输出物料的粒度。建议谨慎选择刀片配置和宽度，以确保粉碎机达到最佳性能。

Blade Configuration & Width

Blade profile and width can be specified to suit the type of materials being processed. The width of the output material fractions can be controlled by the thickness of blades. Careful selection of the blade configuration and width is recommended to ensure optimum shredder performance.



花键驱动轴

六角轴至今仍被许多人视为有效设计，若非因松动叶片在轴上晃动导致的磨损和维护问题——尤其在频繁反转的高负荷工况下——它本应仍是众多用户的优选方案。
FANTE通过花键轴设计解决了松动叶片引发的问题，该设计能将叶片与垫片牢固锁定在驱动轴上，彻底消除叶片晃动现象，从而延长轴的使用寿命。

Splined Drive Shafts


Hexagonal shafts are still considered by many to be an effective design, and were it not for the wear and maintenance problems caused by loose blades rocking on the shafts, particularly in demanding applications with frequent reversals, they would still be preferred by many users.
FANTE has resolved these issues caused by loose blades with our splined shaft design, which securely locks blades and spacers on the drive shafts, eliminating blade rock and prolonging shaft life.



FTS/FT2S series					
型号Model	FTS-300	FTS-400	FT2S-400	FTS-500	FT2S-500
电机Motor	3KW-4,1Set	4.5KW-4,1Set	4.5KW-4,2Sets	7.5KW-4,1Sets	7.5KW-4,2Sets
减速器Reducer	JKA-77,1Set	JKA-87,1Set	JKA-87,2Sets	JKA-97,1Sets	JKA-97,2Sets
输入速度Input Speed	16Rpm	16Rpm	17Rpm	17Rpm	15Rpm
输入扭矩Input Torque	1696Nm	2176Nm	3952Nm	4574Nm	8255Nm
轴直径Shaft Diameter	Φ60mm	Φ60mm	Φ60mm	Φ70mm	Φ70mm
刀片尺寸Blade size	Φ180*12mm	Φ180*15mm	Φ180*15mm	Φ200*20mm	Φ200*20mm
刀片数量No. of blade	25 pcs	26pcs	26pcs	25pcs	25pcs
进料口尺寸Feed Port Size	500*500*300	500*600*300	500*600*300	600*700*400	600*700*400
机器尺寸Dimension	1050*600*1400	1160*600*1450	1540*600*1450	1350*600*1500	1840*650*1450







FTHS/FTHS-P series						
型号Model	600	1000	1200	1600	1800	2000
功率Power (kW)	11-15	30-75	37-150	75-264	110-220	150-500
腔室长度Chamber length (mm)	600	1000	1200	1600	1800	2000
刀片尺寸Blade size (mm)	Φ300-Φ800					
减速器Reducer	ZSY Or Planetary reducer					














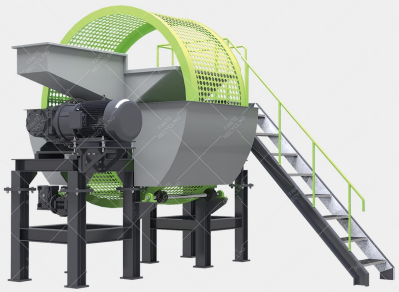





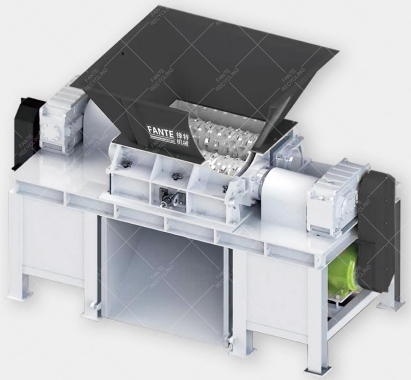



- 双转子设计，产生撕裂与撕碎效果。
- V形转子，配备交错式刀片。
- 热处理转子刀具——采用特种DC53钢材（淬硬），更换前拥有四个切削刃。
- 长寿命、可调式定刀，可维持切削间隙。
- 耐磨涂层——针对高磨损工况的钨钢表面涂层。

- Dual-Rotor Design generates a tearing and shredding effect.
- V-Shaped Rotor with staggered cutter inserts.
- Heat-Treated Rotor Knives - Special DC53 steel (hardened) with four cutting edges before replacement.
- Long-Life, Adjustable Fixed Blades allow cutter clearance to be maintained.
- Wear-Resistant Coating - Tungsten surface coating for abrasive applications.

FTHS-T series


型号Model	FTHS-T-800	FTHS-T-1000	FTHS-T-1200
尺寸Dimension（mm）	3250×1350×1800	4250×1700×2200	4600×1900×2700
进料轮胎直径Feed tire diameter（mm）	≤800	≤1200	≤1200
刀片数量Number of blades（pcs）	16	20	24
刀片尺寸Blade size（mm）	Φ450×50	Φ450-Φ600×50	Φ500-Φ600×50
转速Rotational speed（RPM）	18	25	25
产量Yield（kg/h）	1500	3000-4000	4000-5000
产出尺寸Discharge size（mm）	50×50	50×50	50×50
主驱动器Main Drive（kW）	55	75/90	110/132
滚动筛功率Rolling screen power（kW）	1.5	2.2	2.2
重量Weight（kg）	Approx 约 5000	Approx 约 9000	Approx 约10000



PE 薄膜(98%)
Polyethylene film (98%)



纸制品
paper products



线缆
cable



编织袋
woven sack

FTHS-W series

型号Model	FTHS-W-1000	FTHS-W-1200
尺寸Dimensions (mm)	3500×1550×2560	4360×2150×3000
料斗开口Hopper opening (mm)	1660×1530	1850×1700
卸货高度Discharge Height (mm)	1150	1150
旋转尺寸Rotation dimensions (mm)	Φ385	Φ480
旋转速度Rotation speed (rpm)	82	82
转刀数量Number of rotor knives (pcs)	114	138
定刀数量Number of fixed knives (pcs)	4	6
主功率Main power (kW)	110	180
重量Weight (kg)	5950	12500


单轴撕碎机
Single Shaft Shredder

FTHSS

HSS系列单轴撕碎机是重型减容设备，专为将各类未经处理的废料粉碎成粗粒或中粒物料而设计。其强劲耐磨的机械结构特别适用于高强度回收作业。


HSS Series Single Shaft Shredders are heavy duty reduction machines specifically designed for shredding a wide variety of untreated waste material streams down into either coarse or medium sized fractions. The powerful, wear-resistant machine structure is well suited to demanding recycling tasks.

FTHSS series						
型号Model	FTHSS-1500	FTHSS-1800	FTHSS-2000	FTHSS-2200	FTHSS-2400	FTHSS-2200
外形尺寸Dimension（L×W×H）（mm）	3710×2880×2530	4070×4070×2870	3710×4150×2530	3920×4500×2720	4070×4670×2870	3920×5600×2720
料斗开口Hopper Opening（L×H）（mm）	2080×1880	2530×2130	2080×2380	2380×2580	2530×2780	2380×3180
出料高度Discharge Height（mm）	720	800	720	720	800	720
旋转直径Rotation Diameter（mm）	Φ480	Φ800	Φ480	Φ650	Φ800	Φ650
刀辊长度Operation Length（mm）	1500	1790	2000	2240	2240	2840
转速Rotation Speed（rpm）	80	80	80	80	80	80
推料行程Ram（mm）	1100	1100	1100	1100	1100	1100
动刀数量Number of Rotor Knives（pcs）	84+6	106+6	95+6	109+6	124+6	125+6
定刀数量Number of Counter Knives（pcs）	3+3	3+3	4+4	4+4	4+4	5+5
电机功率Main Drive（kW）	90	90+90	55+55	90+90	132+132	110+110
液压功率Hydraulic Power Pack（kW）	7.5	11	11	15	15	15
重量（kg）	Approx 约11110	Approx 约16000	Approx 约14800	Approx 约18000	Approx 约20000	Approx 约21000

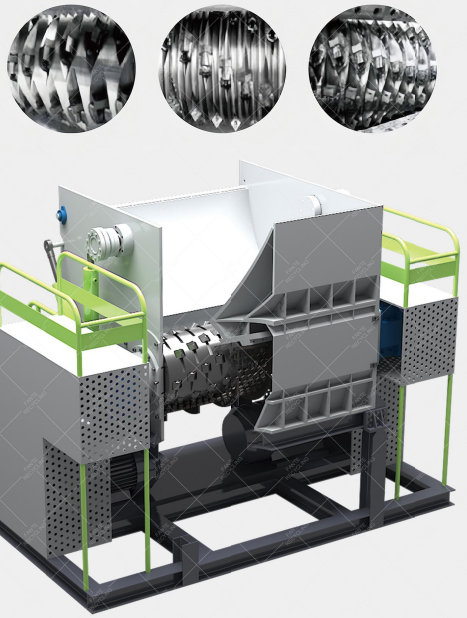



强制进料闸板
Force Feeding Ram



高性能刀辊
High Performance Rotor



液压开合装置
Hydraulic Opening Design



筛网托架
Classifier Screen



双液压驱动装置
Hydraulic Power Unit



驱动系统
Driving System

FTSS

SS单轴撕碎机是适用于将多种物料粉碎成均匀粒度的中小型减容设备。其产出的成品颗粒常可直接销售，或通过后续设备（如造粒机、压块机等）进行深加工。处理能力通常在300kg/h至5,000kg/h以上，具体取决于设备型号、物料类型、筛网尺寸及用途。

Single Shaft Shredders are small to medium size reduction machines suitable for processing a wide range of materials to a uniform particle size. The cutput product created can often be sold as is, or be sent for further processing through additional equipment (granulators, briquetters, etc.). Throughputs typically range between 300 kg/hr and 5,000 kg/hr+, depending on the machine model, material type, screen size, and application.

这种多功能撕碎机的典型应用包括：

- 塑料类 – 注塑件、清料/块料、型材、薄膜等
- 木材类 – 托盘、木工废料、绿植废料等
- 纸张与纸板 – 机密文件、生产废料、包装材料等
- 铜类 – 家用、汽车、通信及工业电缆（含S.W.A.电缆）
- 铝制品 – 废旧饮料罐、铝屑、电缆等
- 纺织品 – 地毯（卷材及地砖）、服装等
- 安全销毁 – 假冒商品、瑕疵品、过期库存等
- 泡沫材料 – 生产废料、隔热材料、产品填充物等

Typical applications for this versatile range of shredders include:

- Plastics – Mouldings, purgings/lump, profiles, films, etc.
- Timber/Wood – Pallets, joiners' waste, green waste, etc.
- Paper & Cardboard – Confidential documents, production waste, packaging materials, etc.
- Copper – Household, automotive, telecoms and industrial cables including S.W.A.
- Aluminium – Used Beverage Cans (UBCs), swarf, cables, etc.
- Textiles – Carpet (rolls & tiles), garments, etc.
- Security Destruction – Counterfeit items, faulty goods, out-of-date stocks, etc
- Foams – Production waste, insulation materials, product fillings, etc.



线缆
Cables


管材
Pipes

木材
Wood

塑料块
Plastic Lumps

塑料托盘
Plastic Frames

塑料零件
Scrap Plastic

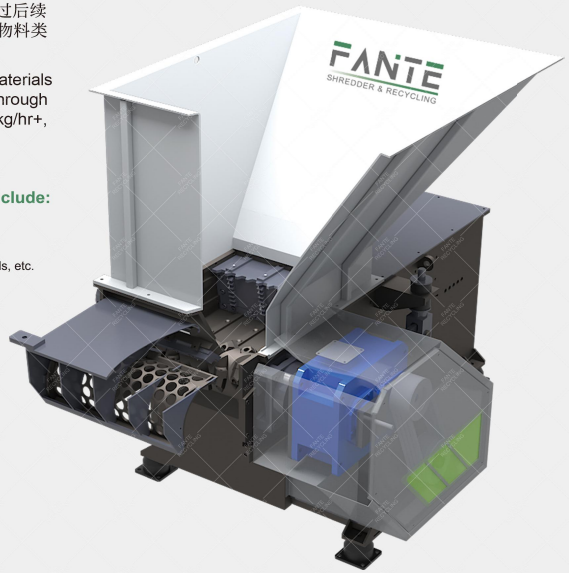

FTSS series		
型号Model	FTSS-600	FTSS-800
尺寸Dimension(mm)	1780×1290×1690	2670*1760*2090
料斗开口Hopper Opening(mm)	1200×1090	1500×1430
出料高度Discharge Height(mm)	480	560
旋转尺寸Rotation Dimension(mm)	Φ225	Φ285
旋转速度Rotation Speed(rpm)	80	80
转刀数量Number of Rotor knives(pcs)	23+4	35+4
定刀数量Number of Fixed knives(pcs)	2+2	2+2
操作直径Operation Diameter(mm)	600	800
料斗容积Hopper Volume(L)	760	1500
筛网尺寸Screen Size(mm)	Φ40	Φ40
主功率Main Power(kW)	18.5	37
液压动力Hydraulic Power(kW)	2.5	3.75
重量Weight(kg)	Approx 约1750	Approx 约4200

FTSS series		
型号Model	FTSS-1000	FTSS-1200
尺寸Dimension(mm)	2670×1960×2090	2670*2500*2090
料斗开口Hopper Opening(mm)	1420×1700	1420×1900
出料高度Discharge Height(mm)	560	560
旋转尺寸Rotation Dimension(mm)	Φ395	Φ395
旋转速度Rotation Speed(rpm)	80	80
转刀数量Number of Rotor knives(pvc)	45+4	55+4
定刀数量Number of Fixed knives(pvc)	2+2	2+2
操作直径Operation Diameter(mm)	1000	1200
料斗容积Hopper Volume(L)	1760	2030
筛网尺寸Screen Size(mm)	Φ40	Φ40
主功率Main Power(kw)	45	55
液压动力Hydraulic Power(kw)	3.75	5.5
重量Weight(kg)	Approx 约4250	Approx 约5050

粉碎机
Crushing Machine

FTC-H

FTC-H系列重型粉碎机功率范围为55千瓦至315千瓦，专为高产量加工设计。该系列粉碎机提供多种转子配置方案，应用范围广泛，包括：中空及大体积物料（如塑料桶、托盘和椅子）、柔性材料（如薄膜、编织袋和橡胶）、高强度材料（如型材、厚板材）以及其他通用塑料。


FTC-H Series Heavy Duty Granulators with power ratings of 55kW to 315kW are designed for high-throughput processing. With a variety of rotor configurations available, these granulators have a wide range of applications including: hollow and voluminous materials (i.e., plastic drums, crates, and chairs), flexible materials such as film, woven bags, and rubber, tougher materials like profiles, thick sheets, and other general plastics.



PP 塑料薄膜
Scrap Plastic



PP 编织袋
Scrap Plastic

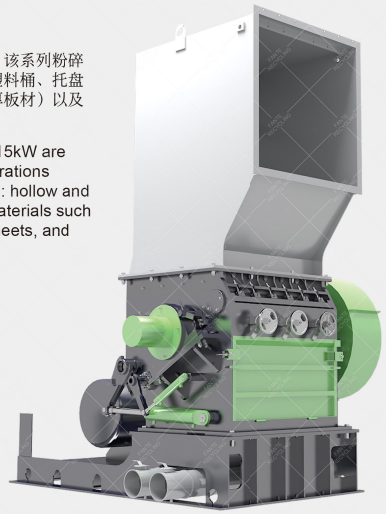

FTC-H series									
型号Model	FTCH-600/350	FTCH-600/450	FTCH-800/450	FTCH-800/600	FTCH-1000/600	FTCH-1200/600	FTCH-1200/800	FTCH-1400/800	FTCH-1600/800
电机Motor(kW)	22	30	37	55	55/75	75/90	132	132/160	160
转速Rotating Speed(rpm)	580	580	580	520	520	520	480	480	480
动刀Rotating Blades(pcs)	6	6	6	10/14	10/14	10/14	14	14	14
定刀Fixed Blades(mm)	2	2	4	4	4	4	4	4	4
旋转直径Rotating Diameter(mm)	350	450	450	600	600	600	800	800	800
进料口Feed Opening(mm)	450×600	530×600	530×800	705×800	800×1000	800×1200	1200×1200	1400×1400	1600×1600
筛网直径Screen Diameter(mm)	Φ10-50	Φ10-50	Φ10-50	Φ10-50	Φ10-50	Φ10-50	Φ12-50	Φ12-50	Φ12-50
产量Capacity(kg)	200-400	300-500	400-600	500-800	800-1200	1000-1500	1200-2000	2000-2400	3000-3500
液压动力Hydraulic Power(kW)	/	1.1	1.5	1.5	1.5	1.5	3	3	3
重量Weight(kg)	1800	2600	3100	3500	4500	5500	9500	12000	1400
尺寸Dimension(mm)	1650×1370×1950	2000×1550×2550	2000×1750×3150	2100×1750×3200	2300×1950×3350	2300×2150×3350	3200×2400×4500	3500×2500×5000	3860×2650×5380



定制主轴
主轴采用高强度焊接钢结构，具有独特的V形设计，所有主轴均通过严格的动静平衡测试，确保设备运行的可靠性。

Customized Main Shaft
The main shaft adopts a high-strength welded steel structure with a unique V-shaped design. All main shafts have passed strict dynamic and static balance tests to ensure the reliability of machine operation.




外轴承座
主轴与机体通过密封圈密封，有效防止粉碎物料进入轴承，从而延长轴承使用寿命。


External bearing seat
The main shaft and the machine body are sealed by a sealing ring, which effectively prevents the shredded materials from entering the bearing, prolonging the life of the bearing.



液压开启系统
上下壳体与筛网支架均采用液压控制，便于设备维护，实现刀片与筛网的快速更换。

Hydraulic opening system
The upper and lower housings and the screen bracket are hydraulically controlled, facilitating easy machine maintenance and quick replacement of blades and screens.







FTC

FTC系列粉碎机是专为单次高效粉碎各类物料而设计的高速粉碎设备。该系列设备适用于处理多种材料，包括塑料、橡胶、纤维、铜缆及轻质有色金属等。

FTC Series Granulators are high-speed granulation machines designed especially for the efficient size reduction of various materials in a single pass. These machines are ideal for processing a multitude of materials including plastics, rubber, fibers, copper cable, and light non-ferrous metals, among others.










FTC series						
型号Model	FTC-300	FTC-400	FTC-500	FTC-600	FTC-700	FTC-800
电机Motor(kW)	5.5	7.5	11	15	22	90
转速Rotating Speed(rpm)	610	580	610	500	490	440
动刀Rotating Blades(pcs)	9	12	15	18	21	24
定刀Fixed Blades(mm)	2	2	2	4	2	2
旋转直径Rotating Diameter(rrm)	Φ215	Φ245	Φ245	Φ290	Φ360	Φ400
进料口Feed Opening(mm)	300×200	400×250	500×285	600×315	685×430	800×450
筛网直径Screen Diameter(mm)	Φ8	Φ10	Φ10	Φ12	Φ12`	Φ12
产量Capacity(kg)	150-200	250-400	300-500	500-600	600-700	700-800
重量Weight(kg)	350	445	650	895	1325	1800
尺寸Dimension(mm)	1250×750×1120	1410×850×1450	1500×970×1570	1800×1110×1870	2000×1260×2200	2200×1370×2400


FTPC

FTPC大口径系列塑料粉碎机适用于回收箱体、薄壁管件、吹塑件、瓶罐、壳体及PE、PP薄膜等塑料材料。平刀系列粉碎机操作简便、调节迅速，其宽幅平刀结构适用于粉碎大块体及海洋产品，显著提升粉碎效率。设备配备电气控制安全装置，箱体采用双层结构并内填隔音材料，确保设备安全环保、节能高效且经久耐用。

The FTPC large-diameter series plastic crusher is suitable for recycling plastic materials such as boxes, thin pipe fittings, blow-molded parts, bottles, shells, and PE and PP film materials. The flat-knife series crusher is easy to operate and quick to adjust, and the wide structure of the flat knife is suitable for crushing bulky and marine products, improving crushing efficiency. It is equipped with an electric control safety design, and the box adopts a double-layer structure with soundproofing materials filled inside, making the equipment safe, environmentally friendly, energy-efficient, and durable.









FTPC series				
型号Model	FTPC-5060	FTPC-5070	FTPC-5080	FTPC-50100
电机Motor(kW)	15	18.5	22	30
动刀Rotating Blades(pcs)	6	6	6	6
定刀Fixed Blades(mm)	4	4	4	4
旋转直径Rotating Diameter(mm)	Φ450	Φ450	Φ450	Φ450
进料口Feed Opening(mm)	620×470	720×470	820×470	1000×470
进料口高度Feed Inlet Height(mm)	1410	1415	1420	1500
筛网直径Screen Diameter(mm)	Φ14	Φ14	Φ16	Φ16
产量Capacity(kg)	≤550	≤700	≤900	≤1000
重量Weight(kg)	890	980	1280	1800
尺寸Dimension(mm)	1360×1180×1840	1470×1280×1860	1520×1380×1880	1800×1750×2200


立式破碎机
Vertical Crusher

FTHC-V

FTHC-V系列立式破碎机主要推荐用于处理双轴粉碎机系统预破碎的金属废料。该设备能高效缩小预破碎物料尺寸并提高其密度，同时分离出不同粒度的物料，从而优化分选效果并降低运输成本。
破碎腔上部的破碎锤将物料击碎至足够小，使其能进入磨环与腔体衬板之间的间隙。物料进入第二阶段时，研磨环通过冲击、碾磨和轧压作用将其塑造成洁净致密的颗粒。当研磨至足够细小后，成团物料落入下腔室，由排料桨叶排出。上述三阶段工艺可生产出洁净且具有高堆积密度的成品，满足运输要求。

FTHC-V series vertical hammer crushers are mostly recommended for applications processing pre-crushed metal scrap from twin-shaft shredder systems. These machines aggressively size reduce and densify pre-crushed material whilst liberating the various different fractions, allowing for better separation and reduced transportation costs. The breakers in the upper part of the chamber smash the material until it is small enough to enter the gap between the milling rings and chamber liners. When the material enters the second stage, the milling rings mpact, grind, and roll the material into clean, dense nuggets. When milled into small enough pieces, the balled-up material falls into the lower chamber and is ejected by the discharge paddles. The three stages above create a product which is both clean and of high bulk density, suitable for transportation.

FTHC-V series			
型号Model	FTHC-V-1500	FTHC-V-3500	FTHC-V-6000
外形尺寸Dimension (mm)	300×3800×5000	5300×4650×6450	550C×4750×6600
转速Rotating Speed (rpm)	680	540	500
腔室直径Chamber Diameter (mm)	Φ1140	Φ1560	Φ1680
腔室高度Chamber Height (mm)	1680	1785	1890
锤头数量Number of Breakers (Pcs)	2	2	2
滚刀数量Number of Rings (Pcs)	36	64	64
定刀数量Number of Liners (Pcs)	12+12	12+12	12+12
主功率Main Power (kW)	110	132+132	220+220
液压功率Hydraulic Power (kW)	1.5	2.25	2.25
重量Weight (kg)	Approx 约14500	Approx 约30000	Approx 约45000

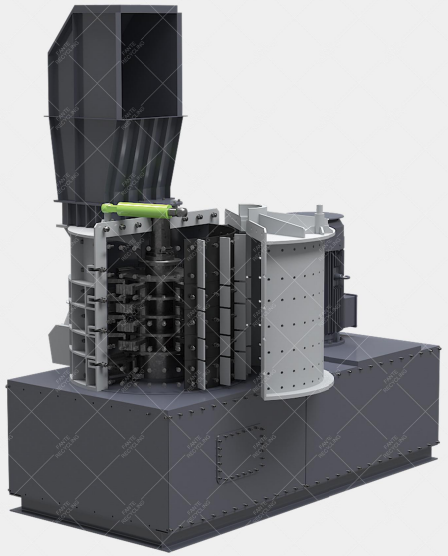



腔室衬板
坚固耐用，抗磨损
可更换式腔室衬板，延长使用寿命

Chamber Liner
Durable and wear-resistant.
Replaceable chamber liners for long service life.




锤破
用于粉碎物料的重型锤式破碎机.

Hammer Breaker
Heavy duty hammer breaker for smashing material.



防爆舱口
符合欧盟标准的防爆设计
可防止爆炸造成的损坏

Explosion-Proof Hatch
EU-approved explosion-proof design prevents damage caused by explosions.




锤片
配备可选锤板
用于破碎大块物料
并分离不同类型的物料

Hammer Mill
Optional hammer plate equipped for smashing bulky material and liberating different types of material.



驱动系统
配备液力耦合器
可提升性能
并降低启动电流

Drive System
Equipped with fluid coupling to improve performance and reduce current during start-up.



锤头
高硬度合金锤头
高速旋转
击碎物料外壳

Ring Mill
Optional ring mill equipped for grinding and rolling the material into clean, dense nuggets suitable for transportation.